



STANDARD TECHNICAL SPECIFICATION

<p>SUPPORTING STRUCTURE</p> <ul style="list-style-type: none"> • Pad on pile foundations, insulated plinth, slabs on 150mm above floor • Prefabricated concrete columns in 12 x 24 cm grid per segment • Prefabricated concrete or steel roof beams, clear height of 10m 	<p>FLOOR</p> <ul style="list-style-type: none"> • Fibre reinforced concrete floor PE membrane, 100 joints, 30mm thick, surface treated with hardener • Load capacity of 55 kN/m², 60 kN point load • Flatness according to DIN 1822, table 3, line 3 	<p>ROOF</p> <ul style="list-style-type: none"> • Corrugated steel sheets, mineral wool insulation, PVC membrane • Free load capacity of 15 kg/m² for clients installations • Min. 2% of slope in warehouse area • Optimum drainage system • Emergency roof access 	<p>FAÇADE</p> <ul style="list-style-type: none"> • Horizontal sandwich panels with mineral wool insulation • Prefabricated concrete facade around docks to approx. 4.5m height • Double-glazed windows in offices with insulated PVC profiles 	<p>DOCKS</p> <ul style="list-style-type: none"> • 1x electrically operated 3 x 3.2 m dock for each 1 500 sqm of hall • Each dock equipped with hydraulic leveler, 60 kN capacity PVC roller, wheel guides • 1x electrically operated 3 x 4.2 m drive-in gate for each 1 500 sqm of hall
<p>HALL INSTALLATIONS</p> <ul style="list-style-type: none"> • Gas safety beacons or infrared gas radiators, heating according to norms for warehousing • 220V lightpoints under roof, PE (ground certified) tank and pumps • 200 kVA 120 kVAr transformer including influence of direct installation • 1x 4.0 kVA dry transformer station per each 1-2 000 sqm of hall 	<p>PRODUCTION UPGRADE (OPTIONAL)</p> <ul style="list-style-type: none"> • Increased facade and roof insulation • Heating and ventilation in accordance with code for manufacturing warehousing • 300 kVA 120 kVAr transformer including influence of direct installation • Increased percentage of skylights area 	<p>OFFICES</p> <ul style="list-style-type: none"> • 2 best custom designed in hall, incl. offices, social, locker rooms, day rooms, exit furniture and equipment • Aluminium entrance door with access to entrance lobby • Thin carpet or PVC floor surfaces, suspended mineral wool panels • Solid frame with enamel, fabric, cell tile, and basic acoustics • PVC color trays below windows, 1x 220V socket per work place • Super room with 1 light units and entrance PVC floor • Top coating 	<p>OUTSIDE AREAS</p> <ul style="list-style-type: none"> • Hard areas from concrete paving, tiled for drainage • 2m high metal fence, entrance barriers and manual gate • Green areas with grass, bushes, and trees 	



Industrial space

15 128 m², Břeclav, Zaječí, Hlavní

Ask for price

Total area	15 128 m ²
Available area for rent	15 128 m ²
Ceiling height	10 m
Floor loading capacity	5 t/m ²
Column grid structure	—
Structure	Reinforced concrete structure
PENB	G
Reference number	107406

15,128 sqm of industrial, warehouse and office space for lease. Premises are suitable for light manufacturing and logistics.

Location:

The park is located in Zaječí near the D2 motorway, which provides a fast connection to Brno and Bratislava, and thanks to the connection to the European E65 road, this park is also ideal for international business activities.

Features and Services:

- Flexible units (storage / office / light production / showroom)
- 52 x car parking places
- 4 x truck parking places
- Truck loading yard
- Retention pond


Storage/Industrial space:

- 4 x Drive-in
- 16 x Loading docks
- Floor loading capacity 5 t/sqm
- Clear height 10 m
- Column grid structure 12x24 m
- 200 Lux LED lighting
- ESFR sprinkler system

Office:

- Office space with facilities according to the clients requirements

Lessee pays no commission.

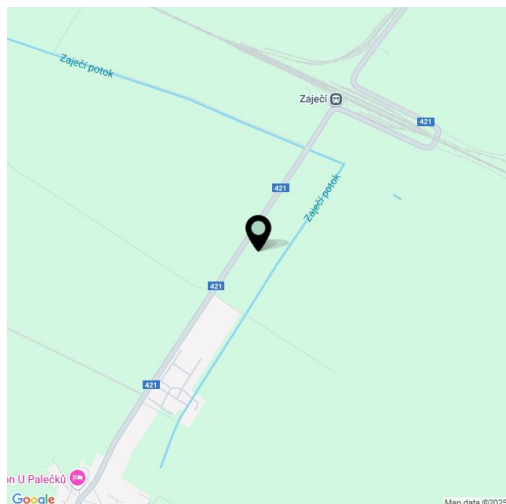



Industrial space

15 128 m², Břeclav, Zaječí, Hlavní

Ask for price

- OCCUPIED
- AVAILABLE
- PLANNED AVAILABLE

