



STANDARD TECHNICAL SPECIFICATION

<p>SUPPORTING STRUCTURE</p> <ul style="list-style-type: none"> • Pad on pile foundations, insulated plinth, slabs on 150cm above floor • Prefabricated concrete columns in 12 x 24 cm grid per span • Prefabricated concrete or steel roof beams, clear height of 10m 	<p>FLOOR</p> <ul style="list-style-type: none"> • Fibre reinforced concrete floor PE membrane, 100 joints, 30cm thick, surface treated with hardener • Load capacity of 55 kN/mq, 60 kN point load • Flatness according to DIN 1822, table 3, line 3 	<p>ROOF</p> <ul style="list-style-type: none"> • Corrugated steel sheets, mineral wool insulation, PVC membrane • Free load capacity of 15 kg/mqm for clients installation • Min. 2% of slope in warehouse area • Optimize drainage system, emergency roof access 	<p>FAÇADE</p> <ul style="list-style-type: none"> • Horizontal sandwich panels with mineral wool insulation • Prefabricated concrete facade around docks to approx. 4.5m height • Double glazed windows in offices with insulated PVC profiles 	<p>DOCKS</p> <ul style="list-style-type: none"> • 1x electrically operated 3 x 3.2 m dock for each 3 000 sqm of hall • Each dock equipped with hydraulic leveler, 60 kN capacity PVC roller, wheel guides • 1x electrically operated 3 x 4.2 m drive in gate for each 3 000 sqm of hall
<p>HALL INSTALLATIONS</p> <ul style="list-style-type: none"> • Gas safety beacons or infrared gas radiators, heating according to norms for space heating • 120V light bulbs under roof, PE (ground certified) bank and pumps • 200 lux LED lighting including influence of direct irradiation • 1x 400 kVA dry transformer station per each 12 000 sqm of hall 	<p>PRODUCTION UPGRADE (OPTIONAL)</p> <ul style="list-style-type: none"> • Increased facade and roof insulation • Heating and ventilation in accordance with code for manufacturing (assembling) • 300 lux LED lighting (including influence of direct irradiation) • Increased percentage of skylights area 	<p>OFFICES</p> <ul style="list-style-type: none"> • 2 best custom designed in hall: incl. offices, social, locker rooms, day rooms, exit furniture and equipment • Aluminium entrance door with access to entrance lobby • Thin carpet or PVC floor surfaces, suspended mineral wool panels • Solid Form with covered facade, wall tile, and floor accessories • PVC color floor below windows, 1x 220V socket per work place • Safety mats with 1x light units and entrance PVC floor • Trip coating 	<p>OUTSIDE AREAS</p> <ul style="list-style-type: none"> • Hot areas from concrete panels, slotted for drainage • 200mm thick base, entrance barriers and metal gate • Green areas with grass, bushes, and trees 	



Industrial space

29 700 m², Žďár nad Sázavou, Velká Bíteš

Ask for price

Total area	29 700 m ²
Available area for rent	29 700 m ²
Ceiling height	12.5 m
Floor loading capacity	5 t/m ²
Column grid structure	—
Structure	Reinforced concrete structure
PENB	G
Reference number	107447

29,700 sqm of industrial, warehouse and office space for lease in the logistic park. The premises are suitable for light manufacturing and warehousing. Photos are illustrative.

Location:

The park is located in an industrial zone in the northwest of the village of Košíkov, west of Brno. Highway D1 (Prague-Brno-Ostrava) exit 162 is 1 km away. Public transport (bus) is within walking distance.

Features and Services:

- Flexible units (storage / office / light production / showroom)
- 82 x car parking places
- Retention pond


Storage/Industrial space:

- 4 x Drive-in
- 54 x Loading docks
- Floor loading capacity 5 t/sqm
- Clear height 12,5 m
- Column grid structure 12x24 m
- 200 Lux LED lighting
- ESFR sprinkler system

Office:

- Office space with facilities according to the clients requirements

Lessee pays no commission.

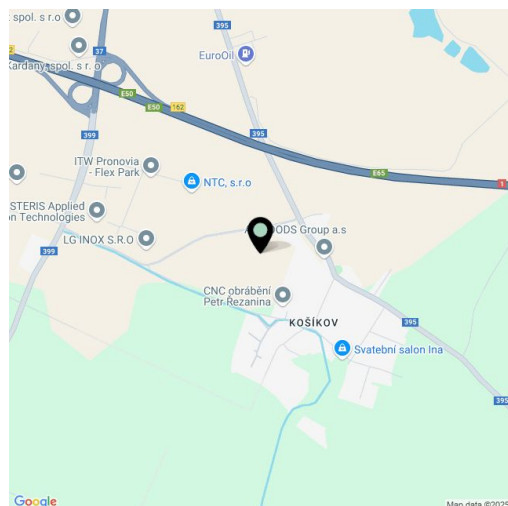



Industrial space

29 700 m², Žďár nad Sázavou, Velká Bíteš

Ask for price

